

SPECIFICATION SHEET

STACKSLIM ESS 230V 5.5KW 5KWH-20KWH

1


PRODUCT PRESENTATION

Home ESS refers to the storage of electricity locally by household energy storage equipment for later use. ESS consists of energy storage batteries, inverters, and other components. We use brand new A-grade LiFePo4 battery, equipped with an intelligent battery management system for charging and discharging cycles. The inverter converts DC energy to AC energy to meet the requirements for household electricity. Normally this product is installed in combination with PV system to provide green electricity to household users, reduce energy consumption, and reduce negative impacts on the environment. It's widely used in remote areas or areas with unstable power supply, to provide reliable, stable, and cost-effective energy supply.



WORKING DIAGRAM

2

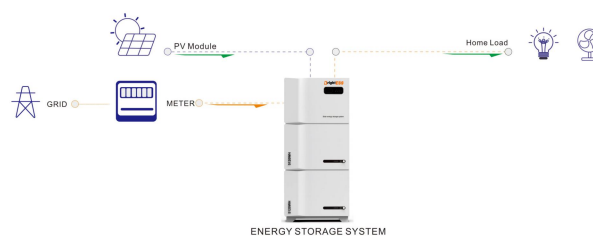


PRODUCT FEATURES

- Private design, modular arbitrary stacking, automatic dialing, convenient installation and wire free.
- Brand new A grade LiFePo4, 8000 times cycle life, Lifespan up to 10 years.
- Inverter and controller integrated, multiple protections, MPPT maximum current over 100A.
- Intelligent LCD display, LED indicator light, real-time monitoring of operating data.
- Full power pure sine wave, stable discharge waveform, better protection for household appliances.
- Support RS485 and CAN communication ports.
- Famous brand BMS, compatible with most inverters in the market.

PRODUCT DIMENSION


W:18.3CM

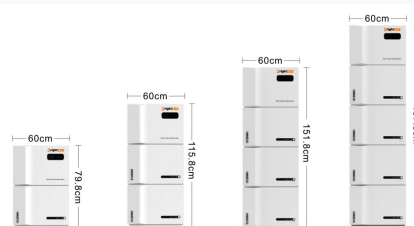

OPERATION FUNCTION

3

Inverter LCD Screen

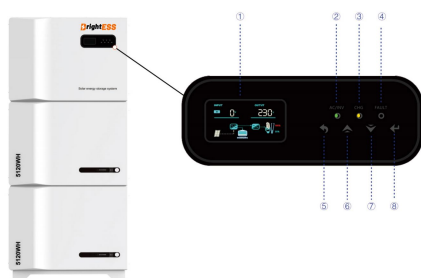


No.	Name	Instruction
①	LCD Screen	Display system operation data
②	Status Indicator	Always on: grid mode,output from AC Flash: battery mode,output from battery or PV
③	Charging Indicator	Always on: battery fully charged Flash: battery charging
④	Fault Indicator	Always on: Inverter failure lash: Inverter warning
⑤	ESC	ESC Mode
⑥	UP	Back to last option
⑦	Down	Turn to next option
⑧	Confirm	Confirm a selection in setup mode or enter setup mode

OPERATION FUNCTION

4

Inverter Interface



No. Interface Instruction

- ① AC OUT
- ② AC IN
- ③ Inverter communication port Rs232
- ④ BMS communication port Rs485
- ⑤ Dry contact NC, normally closed contact
- ⑥ Dry contact C, common contact
- ⑦ Dry contact NO, normally open contact
- ⑧ Inverter switch
- ⑨ PV+
- ⑩ PV-

Battery Indicator Light



No. Port Instruction

- ① 83.0%-100% capacity
- ② 66.4%-83% capacity
- ③ 49.8-66.4% capacity
- ④ 33.2-49.8% capacity
- ⑤ 16.6-33.2% capacity
- ⑥ 0-16.6% capacity
- ⑦ warning light
- ⑧ running light
- ⑨ battery switch

PRODUCT PARAMETER

5

Inverter	Model	SCAP-B-51.2-100	SCAP-B-51.2-200	SCAP-B-51.2-300	SCAP-B-51.2-400
	Rated Power	5.5kW			
	AC Rated Voltage	230VAC			
	Rated Frequency	50/60Hz			
	Efficiency	≥98%			
	Transfer Time	10ms			
	Waveform	Pure sinusoidal wave			
	Battery Overvoltage	58.4V			
	Battery Undervoltage Alarm	45V			
	Constant Voltage Charge	58.4V			
AC Input	Float Voltage	56V			
	Max Charging Current	100A			
	Communication Interface	RS232 (Inverter)/RS485 (BMS)			
	Dimension	60*18.5*59CM			
	Nominal Voltage	230VAC			
	Voltage Range	90-280VAC			
	Rated Frequency	50/60Hz			
	Frequency Range	40-70Hz			
	Rated Current	30A			
	Max AC Current	60A			
PV Input	Max Voltage	500V			
	Optimum Voltage	300-400V			
	Voltage Range	120V-500VDC			
	Max Power	5500W			
Battery	Rated Capacity	5120WH(100Ah)	10240WH(200Ah)	15360WH(300Ah)	20480WH(400Ah)
	Nominal Voltage	51.2V			
	Discharge Voltage Range	43.2V-58.4V			
	Standard Charging Current	50A			
	Max Charging Current	100A			
	Max Discharging Current	100A			
	Depth of Discharge	95%			
	Communication Interface	CAN/RS485			
	Cycle Life	≥6000, 25±2℃, 0.5C, EOL80%			
	Working Temperature Range	Charge: 0℃-50℃; Discharge: -10℃-60℃			
	Storage Temperature	-10℃-60℃			
	Dimension	60*18.5*59CM			

Packing List & Transportation Packing Details

6



Item No	Components	CNT	Carton Size	N.W (kg)	G.W (kg)	Unit CBM (m³)	Total CBM (m³)
SCAP-B-51.2-100	Inverter	1	65*43*24CM	26.5	28	0.067	0.067
	Battery	1	65*44*24CM	44.2	45.7	0.067	0.067
	Accessories	1	61*9*18CM	4.3	4.6	0.010	0.010
SCAP-B-51.2-200	Inverter	1	65*43*24CM	26.5	28	0.067	0.067
	Battery	2	65*43*24CM	44.2	45.7	0.067	0.134
	Accessories	1	61*9*18CM	4.3	4.6	0.010	0.010
SCAP-B-51.2-300	Inverter	1	65*43*24CM	26.5	28	0.067	0.067
	Battery	3	65*43*24CM	44.2	45.7	0.067	0.201
	Accessories	1	61*9*18CM	4.3	4.6	0.010	0.010
SCAP-B-51.2-400	Inverter	1	65*43*24CM	26.5	28	0.067	0.067
	Battery	4	65*43*24CM	44.2	45.7	0.067	0.268
	Accessories	1	61*9*18CM	4.3	4.6	0.010	0.010