

SPECIFICATION SHEET

WALLULTRA ESS 30KWH 34KWH

1


PRODUCT PRESENTATION

Home ESS refers to the storage of electricity locally by household energy storage equipment for later use. ESS consists of energy storage batteries, inverters and other components. We use brand new A-grade LiFePo4 battery, equipped with an intelligent battery management system for charging and discharging cycles. The inverter converts DC energy to AC energy to meet the requirements for household electricity. Normally this product is installed in combination with PV system to provide green electricity to household users, reduce energy consumption, and reduce negative impacts on the environment. It's widely used in remote areas or areas with unstable power supply, to provide reliable, stable, and cost-effective energy supply.



WORKING DIAGRAM

2

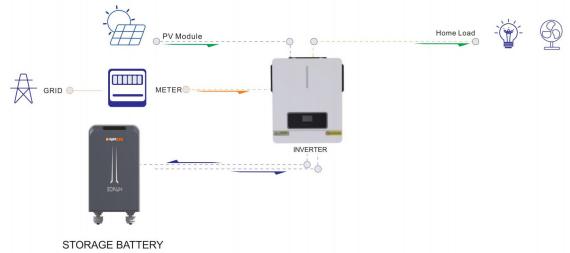

PRODUCT FEATURES

- Original Patent design
- Multi-protection from self-developed BMS
- Brand new battery for 8000 times cycle life

PRODUCT DIMENSION




OPERATION FUNCTION

3

Battery LCD Screen



Battery Interface



No.	Instruction
①	Negative
②	Positive
③	ON/OFF
④	Reset Button
⑤	Dip Switch
⑥	Dry Contacts
⑦	RS485A Communication Port
⑧	CAN Communication Port
⑨	RS232 Communication Port
⑩	RS485-A Communication Port
⑪	RS485-B Communication Port
⑫	Operation Indicator
⑬	Alarm Indicator
⑭	Charging Indicator
⑮	Breaker
⑯	Wi-Fi Antenna

PRODUCT PARAMETER

4



Model	SCAE-C-512-600	SCAE-C-512-670
Rated Capacity	30720Wh(600Ah)	34304Wh(670Ah)
Nominal Voltage	51.2V	51.2V
Discharge Voltage Range	43.2V-58.4V	43.2V-58.4V
Standard Charging Current	100A	100A
Max Charging Current	200A	200A
Max Discharging Current	200A	200A
Depth of Discharge	95%	95%
Communication Interface	CAN/RS485	CAN/RS485
Cycle Life	≥8000 , 25+2°C , 0.5C , EOL80%	≥8000 , 25+2°C , 0.5C , EOL80%
Working Temperature Range	Charge: 0°C-50°C; Discharge: -20°C-60°C	Charge: 0°C-50°C; Discharge: -20°C-60°C
Storage Temperature	-10°C-40°C	-10°C-40°C
Dimension	81*40*75.5cm	81*40*75.5cm

PACKING DETAILS



Item No	Components	CNT	Carton Size	N.W (kg)	G.W (kg)	Unit CBM (m³)
SCAE-C-512-600	Battery, FumaWheel; ScrewPack; DC Cable; Communication Cable	1	87*46*92CM	234	257	0.368
SCAE-C-512-670		1	87*46*92CM	238	261	0.368